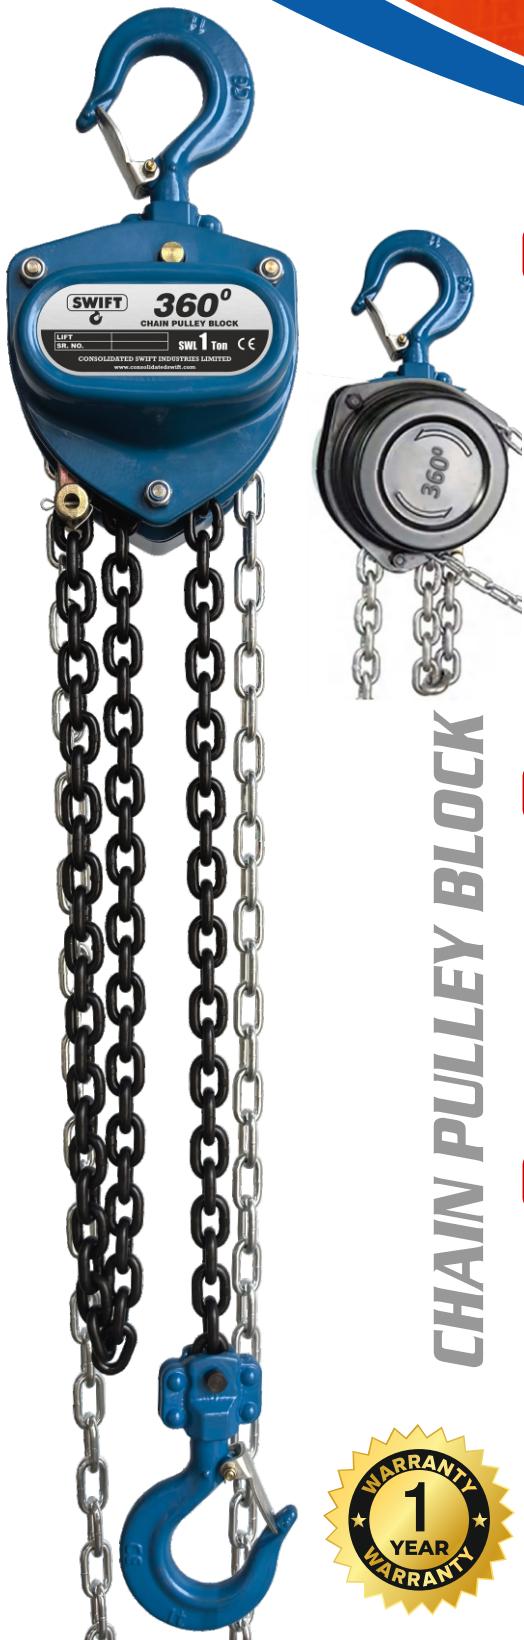


**360°**

CHAIN PULLEY BLOCK

Features

- 360° rotating hand chain wheel enables full-circle operation from any angle
- Fitted with high-grade G80 alloy steel load chain for reliable heavy-duty lifting
- Manganese steel anti-falling hook and thickened shell enhance load security and durability
- Integrated locking plate and hand zipper strip ensure better load control and safe handling
- CE certified, ensuring safe and high-quality operation
- Designed as per IS 3832 design standards for reliable performance


Advantages

- Omnidirectional operation allows use in confined workspaces
- G80 chain ensures long-lasting performance in high-load industrial environments
- Impact-resistant shell protects the internal mechanism from rough handling
- Low effort to lift rated load (as low as 120N) supports smoother manual operation

Benefits

- Greater positioning flexibility boosts efficiency in fabrication, assembly, and repairs
- Reduced maintenance needs and wear increase uptime and lower service costs
- Enhanced safety features minimize the risk of load drop or user injury
- One compact unit handles multiple capacities- 0.5 T to 10T reducing equipment redundancy



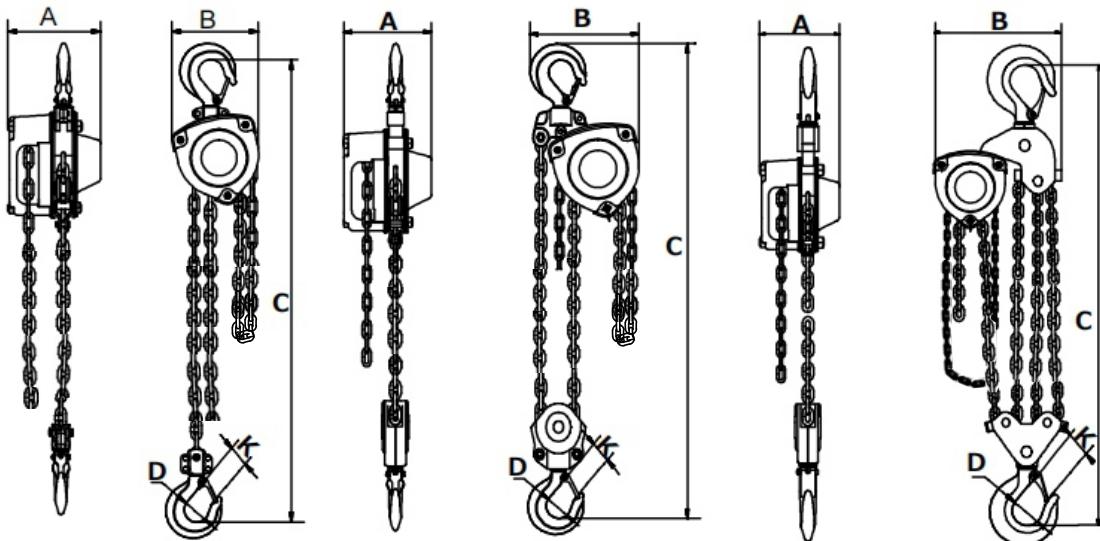

0.5T - 2T

3T - 5T

10T

Capacity	Tons	0.5	1	2	2	3	5	10
Standard Lift	m	3	3	3	3	3	3	3
Running Test Load	KN	7.5	15	30	30	45	75	150
Effort Required to Lift Rated Load	N	120	220	230	250	460	380	408
No of Falls		1	1	2	1	1	2	4
Diameter of Load Chain	mm	6*18	6*18	6*18	8*24	10*30	10*30	10*30
Dimensions (mm)	A	148	148	154	154	176	176	187
	B	175	175	198	198	280	280	463
	C	340	350	442	442	688	688	765
	D	35	38	48	48	50	57	80
	K	23	27	36	36	38	48	54
Net Weight	kg	9.5	10	16	16	26	40	65
Extra Weight Per Meter of Extra Lift	kg	1.6	1.6	2.3	2.3	2.9	5.3	9.7

CONSOLIDATED SWIFT INDUSTRIES LIMITED - A Bajaj Group Company

(Carrying Forward the SWIFT Brand from Consolidated Hoists Private Limited)



+91 94038 92303 | enquire@csil.in | www.consolidatedswift.com

Office No. 402 & 403, Akshay Center, 4th Floor, Tilak Road, Shukrawar Peth, Pune - 411002.