

SWIFT



LEVER BLOCK



LEVER BLOCK

Features

- Features Automatic Double Pawl Braking System for safe, reliable & consistent load control
- Equipped with an asbestos-free friction disc for eco-friendly and health-safe operation
- Uses industrial-grade powder coating, compliant with RoHS for chemical safety & durability
- Delivers smooth lifting with minimal hand effort, starting from just 230N
- CE certified, ensuring safe and high-quality operation
- Follows IS 11340 guidelines to ensure structural integrity and safety

Advantages


- Dual pawls provide backup braking, ensuring safety even if one pawl fails
- Asbestos-free design ensures safety without compromising on friction characteristics
- Powder-coated finish resists corrosion, chips, and chemicals in harsh environments
- High mechanical efficiency allows heavier lifting with less strain
- Global compliance offers peace of mind for critical industrial operations

Benefits

- Meets ISO, JBT7334/EN13157, ANSI B30.1d, and AS1418 safety standards
- Eco-friendly design reduces workplace hazards and supports green procurement goals
- Less operator effort improves productivity and reduces fatigue during extended use
- Durable design with low maintenance lowers long-term ownership costs



Safety First

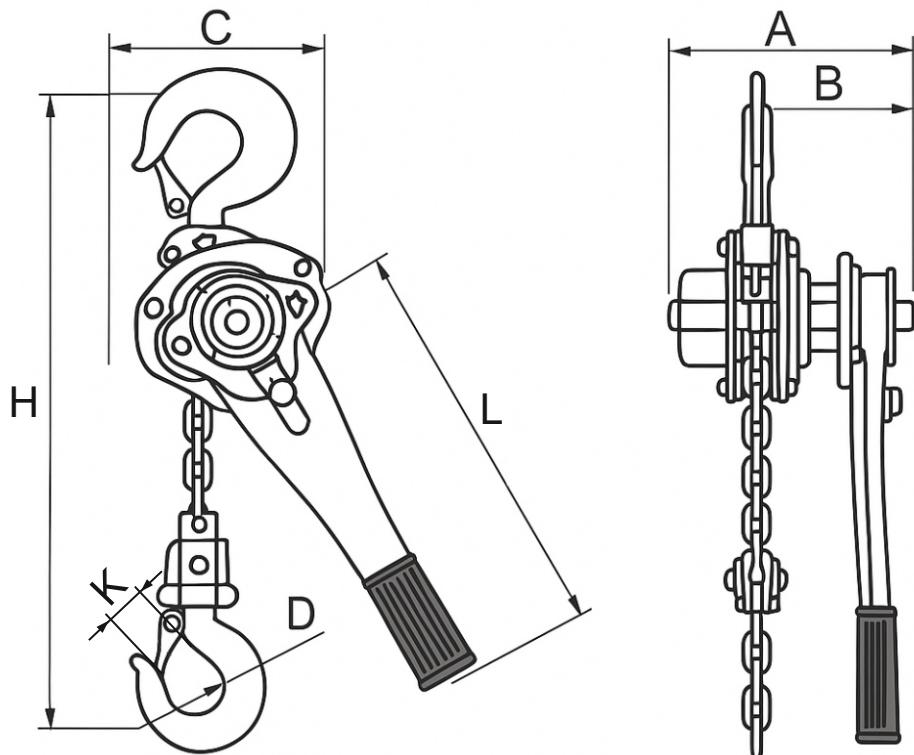

| | | | |
|---|-------------|---------------|--------------|
| Capacity | Tons | 1.5 | 3 |
| Standard Lift | m | 1.5 | 1.5 |
| Running Test Load | KN | 22.5 | 45 |
| Effort Required to Lift Rated Load | N | 230 | 385 |
| No fo Falls | | 1 | 1 |
| Diameter of Load Chain | mm | 7.1*21 | 10*30 |
| Dimensions (mm) | A | 166 | 195 |
| | C | 150 | 202 |
| | D | 48 | 50 |
| | H | 335 | 450 |
| | L | 365 | 365 |
| Net Weight | kg | 9.5 | 16.5 |

CONSOLIDATED SWIFT INDUSTRIES LIMITED - A Bajaj Group Company

(Carrying Forward the SWIFT Brand from Consolidated Hoists Private Limited)



+91 94038 92303 | enquire@csil.in | www.consolidatedswift.com

Office No. 402 & 403, Akshay Center, 4th Floor, Tilak Road, Shukrawar Peth,
Pune - 411002.