

SWIFT



POWERLIFT



HAND PALLET TRUCK

Features

- Available in 2T and 3T variants, catering to diverse lifting needs in industrial environments
- Designed with two frame options to offer versatility across different pallet and load sizes
- Minimum fork height of 85mm enables access under low-clearance pallets and machinery
- Offered with Polyurethane or Nylon wheels to suit different flooring and working environments

Advantages



- It easily maneuvers heavy loads in warehouses, factories, loading docks, and tight spaces
- Multiple fork lengths ensure smooth handling of both standard and oversized pallet sizes
- Wheel material selection allows for quiet, smooth movement while preventing floor wear and tear
- Ergonomic handle and responsive steering reduce operator fatigue during extended use

Benefits

- Durable and low-complexity design reduces breakdowns and maintenance needs
- Rugged construction and high-quality components ensure reliable long-term performance
- Enables quick and safe transport of goods, streamlining workflow and increasing productivity



Safety First

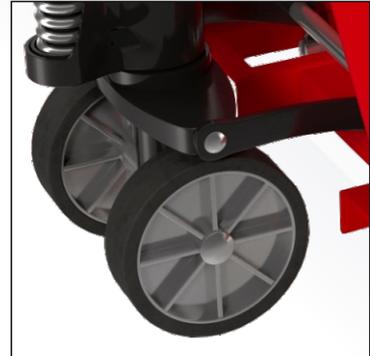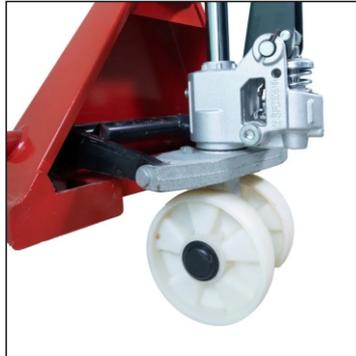

Nylon wheel
Welding pump

PU wheel
Casting pump

Item	Unit	Specification	Specification	Specification	Specification
Rated Capacity	kg	2000	2000	3000	3000
Lowered Fork Height	mm	85	85	85	85
The Rear Wheel	mm	180*50	180*50	180*50	180*50
The Front Wheel	mm	80*70	80*70	80*70	80*70
Maximum Height of Fork	mm	195	195	195	195
The Overall Height	mm	1210	1210	1210	1210
The Overall Length	mm	1540	1540	1590	1590
Fork Length	mm	1150	1150	1200	1200
Fork Outside Distance	mm	230/550	365/685	230/550	365/685
Pallet Fork Size	mm	160*50	160*50	160*50	160*50
Net Weight	kg	58.5	61	68	70

CONSOLIDATED SWIFT INDUSTRIES LIMITED - A Bajaj Group Company

(Carrying Forward the SWIFT Brand from Consolidated Hoists Private Limited)



+91 94038 92303



enquire@csil.in



www.consolidatedswift.com

Office No. 402 & 403, Akshay Center, 4th Floor, Tilak Road, Shukrawar Peth,
Pune - 411002.

