

SWIFT



WIRE ROPE PULLING HOIST



Features

- Available in 0.8T, 1.6T, and 3.2T lifting capacities for varied tasks
- Supports wire rope diameters from 8.3mm to 16mm, ensuring safe handling of various load sizes
- Low-rated forward hand power allows efficient manual operation
- High safety factor of 5 for both wire rope and static load ensures safe performance
- Compact overall dimensions and low net weight enhance ease of handling
- CE certified, ensuring safe and high-quality operation

Advantages

- Multiple capacity options enable users to select the right model for specific operational needs
- Low hand force requirements reduce operator fatigue and improve work efficiency
- Optimized dimensions ensure compatibility with confined workspaces and mobile setups
- Consistent safety factors across all models reinforce user confidence during heavy-duty use


Benefits

- Easy manual handling and setup improve productivity in the field
- Lower physical strain allows longer use without compromising safety or performance
- High safety margins reduce the risk of failure and increase operational reliability
- Ideal for lifting and pulling in construction, industrial maintenance, and equipment setup

WIRE ROPE PULLING HOIST



Safety First

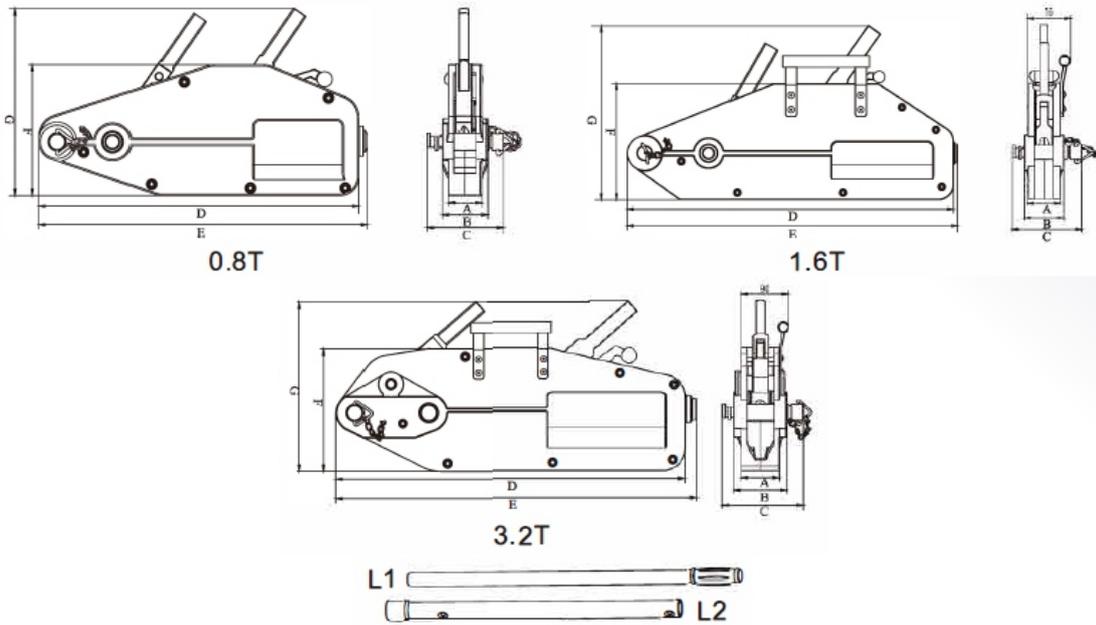

Rated Capacity	kg	800	1600	3200
Rated Forward Handpower	N	343	400	441
Rated Forward Travel	mm	>=52	>=55	>=28
Rope Diameter	mm	8.3	11	16
Wire Rope Safety Factor Load Capacity		5	5	5
Safety Factor & Static Load Capacity		5	5	5
Max. Travelling Load	kg	1200	2400	4800
Max Overall Size (mm)	A	44	56	70
	B	60	68	98
	C	101	120	150
	D	420	545	645
	E	430	556	666
	F	172	200	227
	G	240	270	320
L1	cm	70	70	70
L1 + L2	cm	/	120	120

CONSOLIDATED SWIFT INDUSTRIES LIMITED - A Bajaj Group Company

(Carrying Forward the SWIFT Brand from Consolidated Hoists Private Limited)



+91 94038 92303



enquire@csil.in



www.consolidatedswift.com

Office No. 402 & 403, Akshay Center, 4th Floor, Tilak Road, Shukrawar Peth, Pune - 411002.

